

Float/Float Box Wall Shelf Assembly Instructions



List of parts:

Float shelf or Float Box shelf
mounting bracket
mounting screws
wall anchors
set screws

Tools needed:

level
3/16" drill bit
#2 Phillips screwdriver
power drill
pencil

Note: The maximum recommended load for this product is 20 pounds. If you are mounting this shelf to a surface other than drywall, or if you are uncertain about assembly, please contact a professional for help with installation.

Directions:

1. Place the mounting bracket against your wall at the desired location. Use a level to ensure accurate placement. Ensure the mounting bracket is oriented in correspondence with the "up" arrow. Use a pencil to mark the location of each of the mounting holes. It is recommended that at least one of the holes be centered over a stud.
2. Remove the mounting bracket from the wall and use a #2 Phillips screwdriver to install the wall anchors. (Figure 1) Ensure that the wall anchors are flush to the wall after installation. *Note: It is not necessary to use a wall anchor for mounting holes positioned over studs. Instead, use a drill to pre-drill a 3/16" pilot hole and continue to step 3.*
3. Reposition the mounting bracket and align the mounting holes with the anchors. Use the mounting screws to fasten the mounting bracket to the wall.
4. Slide the shelf over the protruding arms of the mounting bracket with the predrilled holes facing UP, then use the set screws to fasten the shelf in place. (Figure 2)

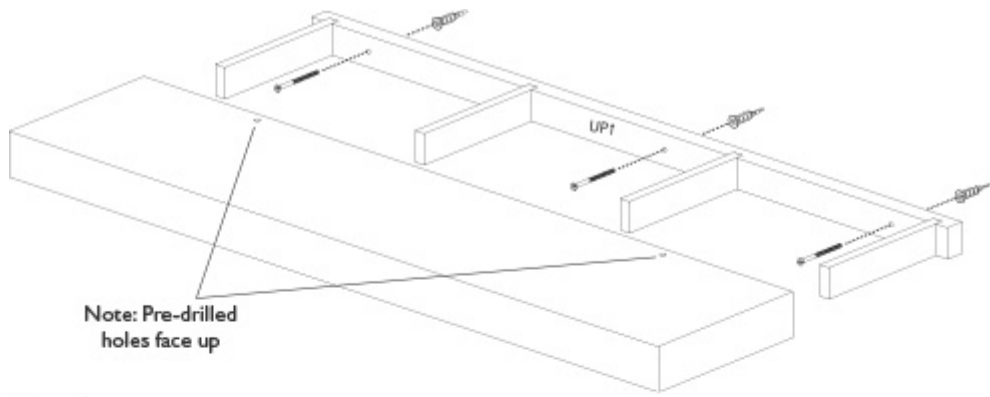


Figure 1

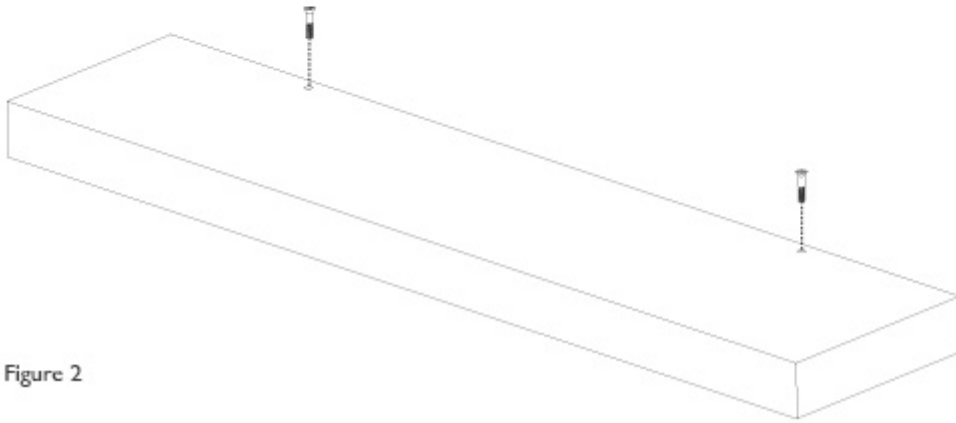


Figure 2