


FLOAT SHELF & FLOAT BOX SHELF

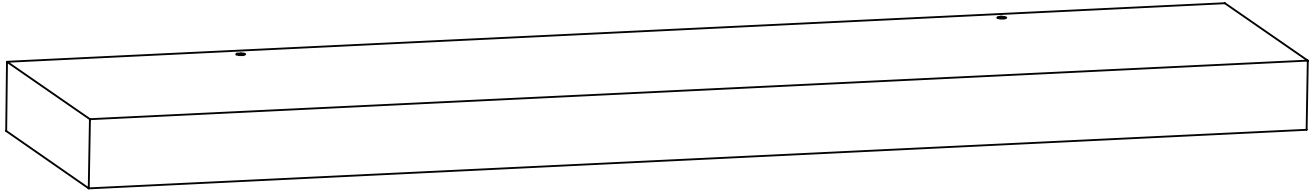


Recommended Tool and Materials:

- Level
- #2 Phillips screwdriver
- Narrow pencil
- 3/8" Drill bit
- Power drill


SPECIAL CONSIDERATIONS:

The maximum recommended load for this product is 20 pounds. If you are mounting this shelf to a surface other than drywall, or if you are uncertain about assembly, please contact a professional for help with installation.

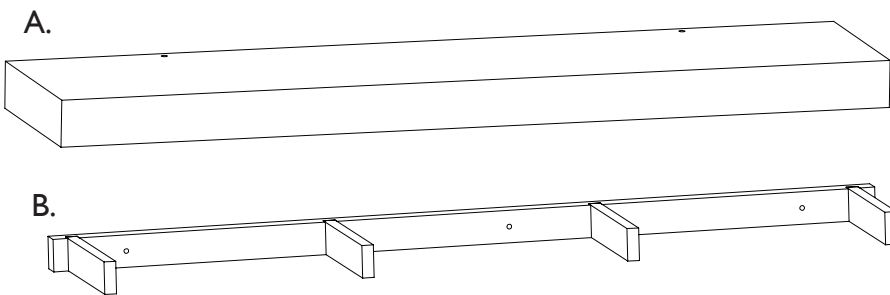


This Product Includes

- A. Float shelf
- B. Mounting bracket
- C. Toggle bolt
- D. Set screws

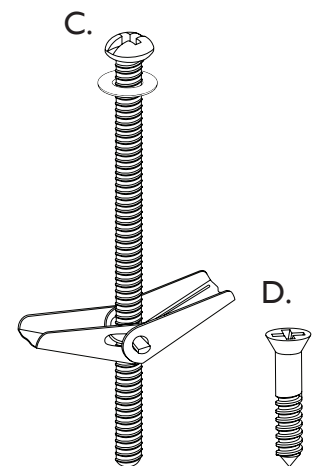

(hardware not to scale)

Installation Instructions

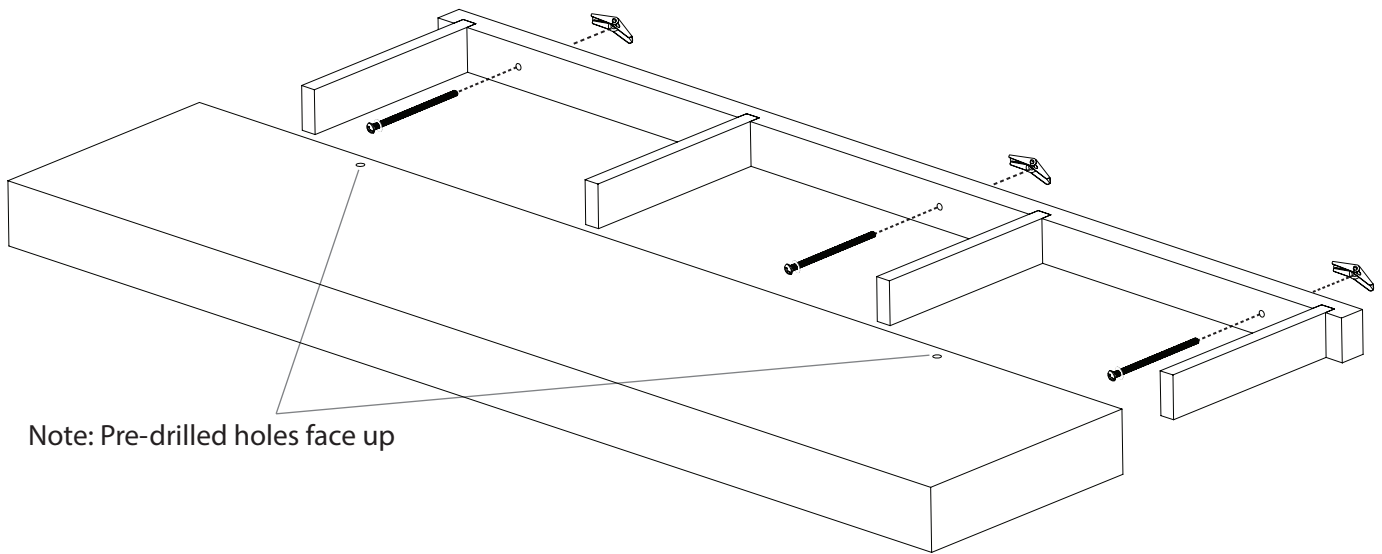

Note: Pre-drilled holes face up

- 1 Place the mounting bracket against your wall at the desired location. Use a level to ensure accurate placement. Use a narrow pencil, pen or other tool to mark your attachment points through the 3/8" holes. It is recommended that at least one of the holes be centered over a stud.

- 2 Remove the mounting bracket from the wall and use a #2 Phillips screwdriver to install the wall anchors. Ensure that the wall anchors are flush to the wall after installation.
Note: It is not necessary to use a wall anchor for mounting holes positioned over studs. Instead, use a drill to pre-drill a 3/8" pilot hole and continue to step 3.

- 3 Reposition the mounting bracket and align the mounting holes with the anchors. Use the mounting screws to fasten the mounting bracket to the wall.

- 4 Slide the shelf over the protruding arms of the mounting bracket with the predrilled holes facing UP, then use the set screws to fasten the shelf in place.

