

# Pike Chair/Stool with Wood Base Assembly Instructions



## List of parts:

- 1 seat frame
- 4 legs
- 1 spreader (stool only)
- 12 1/4" x 40mm screws (A)
- 12 1/4" x 16mm washers (B)
- 4 1/4" x 32mm screws (C) (stool only)

## Tools needed:

Phillips screwdriver

**Note:** Do not use power tools.

## Directions:

1. Rest seat frame upside down on a clean, soft surface so seat is level.
2. Place legs upside down so holes on leg assembly match up with mounting bracket on seat frame.
3. For each leg, loosely attach 3 screws (A) and 3 washers (B) to mounting bracket (Figure 1).
4. Stool only: With legs still attached loosely, attach spreader to legs using the 4 screws (C) provided (Figure 2).
5. Tighten legs.

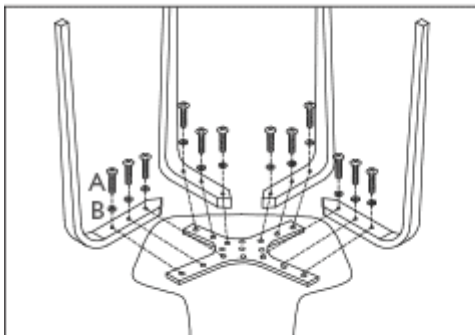


Figure 1




Figure 2