


Comfort Sleeper Disassembly Instructions


Tools needed: Phillips screwdriver
rubber mallet

OVERVIEW OF ASSEMBLY

Two hooks in the back of the arm lock into the back frame of the sofa. Each arm is connected to the deck by one 5/16" x 2½" bolt.

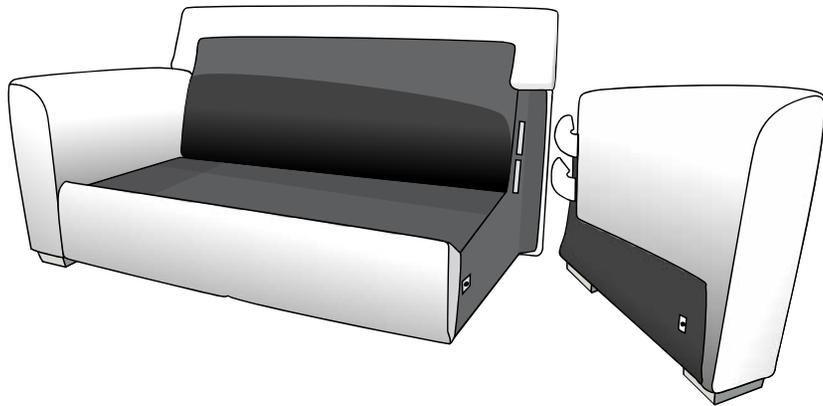


1. Remove seat cushions from the sofa and lift front to lay the sofa on its back.

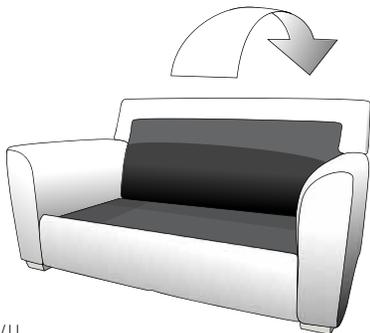


1/1/11


2. Remove the Phillips head screw that locks both zipper sliders in place.

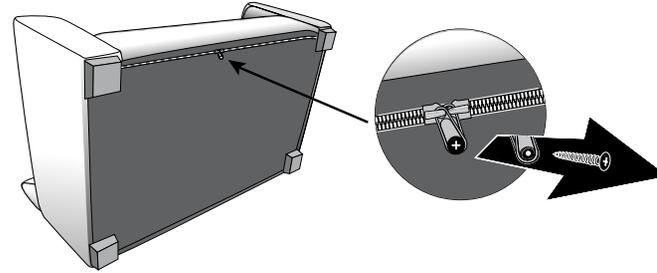

3. Open the zipper towards the side of the arm you want to remove from the sofa frame. Remove the 5/16" x 2½" bolt from the arm side.

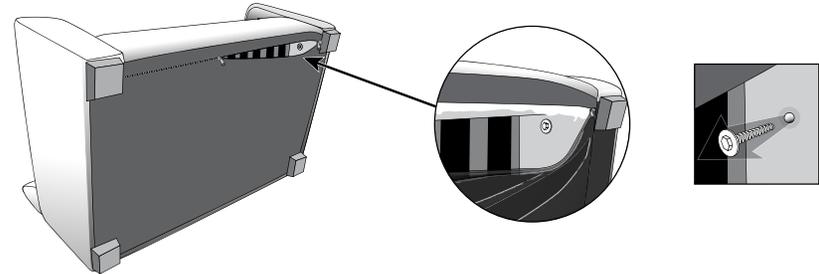

4. Using a rubber mallet, hit the top part of the arm, near the back, until the hooks in the back of the arm release the arm from the sofa frame.

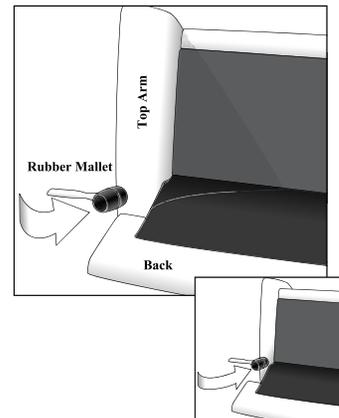

Room&Board®