


assembly instructions: rectangular studio pendant

List of Parts

- | | |
|---------------------|--------------------|
| (A) Wire Nuts | (G) Screw |
| (B) Mounting Plate | (H) Shade Washer |
| (C) Mounting Screws | (I) Shade Washer |
| (D) Canopy | (J) Split Washer |
| (E) Canopy Screws | (K) Wall Anchor |
| (F) Wire Clamp | (L) Support Screws |

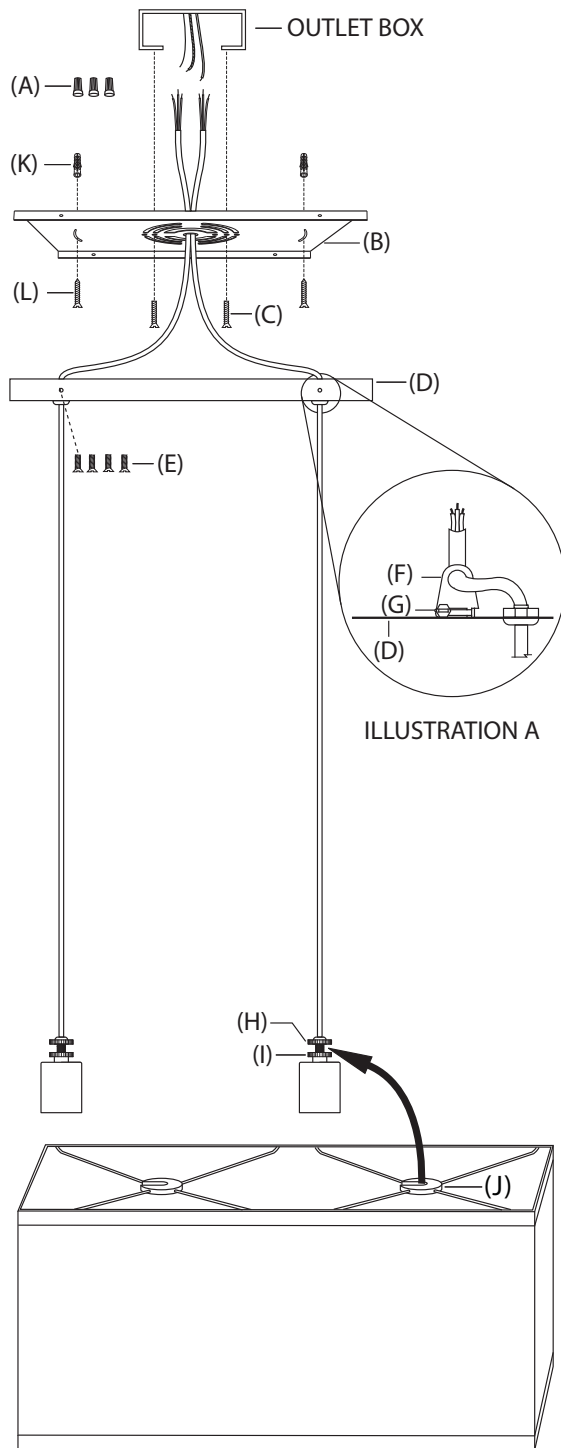

Safety Instructions:

*These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

*WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

*Turn off power at switch before replacing bulbs.

Assembly Instructions:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts carefully from the carton. Do not throw away any parts.
3. Remove mounting plate (B) from canopy (D) by removing canopy screws (E). Set canopy screws (E) aside.
4. Lift the mounting plate (B) to the ceiling outlet box. Once aligned, use a pencil to mark the locations of the mounting holes on the outside edges of the mounting plate.
5. Set the mounting plate aside and drill small holes at the marked locations. Holes should be sized so anchors (K) fit securely inside. Push the anchors into the holes.
6. Attach mounting plate (B) to ceiling outlet box using mounting screws (C). Thread support screws (L) through holes in outside edges of mounting plate and into wall anchors (K) to secure the mounting plate to the ceiling.
7. Measure desired drop for fixture to hang.
8. From inside canopy (D), loosen screws (G) on wire clamps (F). Guide cords through holes in canopy (D) and slide them to the position of desired drop. Pass cords through clamps (F) and tighten screws (G). If necessary, cut excess cord, leaving 8 or 9 inches of length for wire connections.
9. Lift canopy (D) to ceiling outlet box; make proper electrical connections. A licensed electrician is recommended.
10. Attach ground wires from the fixture (green or copper in color) to the ground wire in outlet box.
11. Attach hot wires from fixture (black in color, or smooth side of wire) to hot wire from ceiling outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
12. Attach neutral wires from fixture (white in color or ribbed side of wire) to neutral wire from ceiling outlet box. Fasten wires together with wire nut (A) and tightly wrap connection with electrical tape.
13. Gently push wire connections back into ceiling outlet box. Place canopy (D) flush against ceiling. Use canopy screws (E) to attach the canopy to the mounting plate.
14. Insert two 100W MAX. Type A, medium base bulbs into the sockets.
15. Lift the shade over the bottom section of fixture. Slide split washers (J) between shade washers (H) and shade washers (I). Secure the position of the shade by turning shade washer (H) clockwise until it rests firmly against split washer (J).

** To clean, wipe with a soft cloth. Dont use chemical or abrasive cleaners. **